


# CT1300

## Carbon steel belt



CONTINUOUS  
PROCESS  
SOLUTIONS

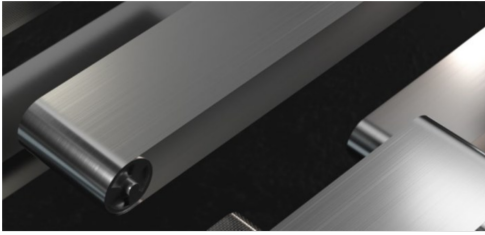

CT1300 is a hardened and tempered carbon steel belt. It has hard and smooth surface and a black oxide layer, making it suitable for any application with a low risk for corrosion. Very good thermal properties make it ideal for baking and for heating and drying of liquids, pastes and fine-grained products. It can be further processed to perforated belts.

### Properties

- ♦ Steel type: Carbon steel
- ♦ Tensile strength: 1250 Mpa
- ♦ Fatigue strength:  $\pm 430$  Mpa
- ♦ Hardness: 380 HV5

### Characteristics

- ♦ Very good static strength
- ♦ Very good fatigue strength
- ♦ Very good thermal properties
- ♦ Excellent wear resistance
- ♦ Good repairability

### Applications

- ♦ Food
- ♦ Wood-based panel
- ♦ Conveyor

### Scope of supply

- ♦ Length - custom sizes available
- ♦ Width - 200 ~ 3100 mm
- ♦ Thickness - 1.2 / 1.4 / 1.5 mm

Maximum width of a single belt is 1500mm, but customised sizes via cutting are available.

### Chemical composition (nominal) %

C	Si	Mn	P	S	Alt	Ti	Ni	Cu	Fe
0.12	0.20	2.41	0.01	0.002	0.3	0.02	-	-	-

### Static strength

Standard strength at room temperature (nominal values)

Parameters	Tensile strength		Yield strength		Elongation	Weld factor	Hardness
	Mpa	Ksi	Mpa	Ksi	A5(%)	Rm/Rm	HV5
Parent material	1250	181	1100	160	10	*	380
Welding area	1000	145	950	138	4	0.75	*

The data in this sheet are typical values but not guaranteed. The information is subject to changes in different batches of material.